
## SETTING TRIANGLE DIMENSIONS

FINISHED BLOCK	CORNER	SIDE
SIZE	TRIANGLES	TRIANGLES
1.5"	2"	3-3/8"
2"	2-3/8"	4-1/8"
2.5"	2-3/4"	4-7/8"
3"	3"	5-1/2"
3.5"	3-3/8"	6-1/4"
4"	3-3/4"	7"
4.5"	4-1/8"	7-5/8"
5"	4-1/2"	8-3/8"
5.5"	4-7/8"	9-1/8"
6"	5-1/8"	9-3/4"
6.5"	5-1/2"	10-1/2"
7"	5-7/8"	11-1/4"
8"	6-5/8"	12-5/8"
9"	7-1/4"	14"
9.5"	7-5/8"	14-3/4"
10"	8"	15-1/2"
11"	8-3/4"	16-7/8"
12"	9-3/8"	18-1/4"
13"	10-1/8"	19-3/4"
14"	10-7/8"	21-1/8"
15"	11-1/2"	22-1/2"

Setting side and corner triangles are used to ensure that the straight grain of the fabric is on the outer edges of the quilt. You will cut quarter square triangles for the side or setting triangles and half-square triangles for the corner triangles.

**Remember:** if you choose to cut over-sized setting triangles, remember to use the measurements from this table as the MINIMUM size and add a little extra to the size of the square. Then trim the edges to square up your quilt top, removing the excess fabric.

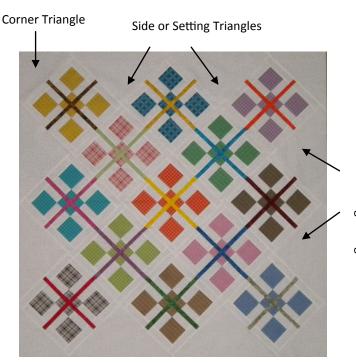

This quilt has 9.5" finished blocks.

You will need 4 corner triangles (Two 7-5/8" squares cut on the diagonal) and 8 side triangles (Two 14-3/4" squares cut on both diagonals.)


## CORNER TRIANGLES:

Using the table, select the row of dimensions for the finished size of the blocks (*Example: 10"*) in your quilt. Cut two squares the size indicated for "Corner Triangles" (8") and then cut those squares on the diagonal creating 4 corner triangles for your quilt top.



## **SIDE or SETTING TRIANGLES:**

Continuing across the row for the finished size blocks in your quilt locate the size square needed for your side triangles. (15-1/2") You'll need to cut as many squares as there are spaces for side triangles on the longest side of your quilt. Count the number of side triangles needed in your quilt top. Divide that number by four and cut that many squares, the size indicated for "Side Triangles". (This quilt has 2 side triangles on each side—so you will need 8 side triangles cut from 2 15 1/2" squares.) Then cut those squares on both diagonals creating the side triangles for your quilt.



## ASSEMBLY OF QUILT TOP:

Quilt blocks are assembled by diagonal rows beginning in the top left corner. Add "CORNER SETTING TRIANGLES" last—after entire quilt top has been sewn together. (Tip: spray bias edges lightly with fabric sizing (not starch) to help prevent them from stretching.)